

MPTAZ Series Control

PAN/TILT, SCANNER AND LENS FUNCTIONS

Product Features

- Desktop or Rack Mount
- For use with 24 VAC, 120 VAC, or 230 VAC Pan/Tilts or Scanners
- AMP CPC Type Connector used for 120 and 230 VAC Models; Terminal Strip Supplied for 24 VAC Models
- Capable of Auto/Random Scan Operation




The **MPTAZ115DT**, **MPTAZ220DT**, and **MPTAZ24DT** integrate pan/tilt, scanner and motorized zoom lens functions into one desktop control and are for use with 120 VAC, 230 VAC, and 24 VAC pan/tilts or scanners. This convenient new control is also capable of auto/random scan operation, which helps to increase the equipment life because its shorter duty cycle reduces gear train and drive motor wear, cable fatigue, and motor temperature rise. Random scan offers the flexibility of continuous auto scan operation with an adjustable time delay that automatically returns to Random scan after approximately 30 minutes. In addition, the control offers an auto scan output pin for Pelco scanners. This output pin allows a scanner to auto scan when the unit is either in the Random or Auto setting. The control will, of course, operate a scanner in the manual mode using the left/right functions of the joystick.

Pan/tilt movements are controlled by an 8-position joystick control. Lens functions and speed are controlled by eight momentary push-button switches.

As with other Pelco controls, 24V models can be used in conjunction with our RB24, RB115 or RB220 relay box to increase the operating distance (control to relay box).

An optional rack mount kit (R400) for mounting two control modules side-by-side is available. A blank filler plate is provided for applications using one control.

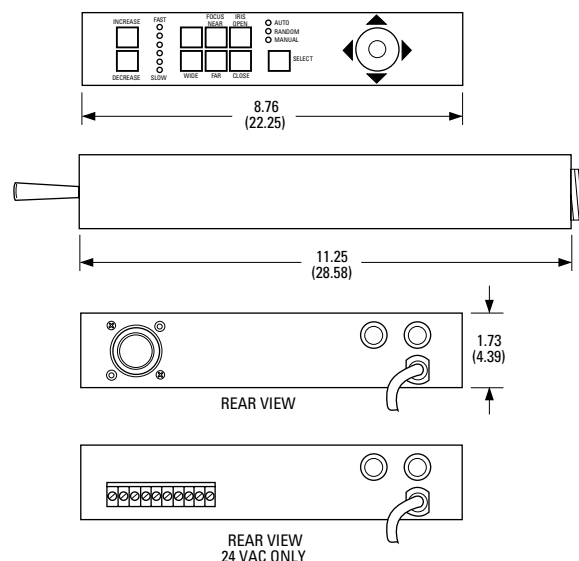

NOTE: VALUES IN PARENTHESES ARE CENTIMETERS; ALL OTHERS ARE INCHES.



DataFAX
SPEC: 2528
MANUAL: 25286

C528 / REVISED 9-02



International Standards
Organization Registered
Firm ISO 9001 Quality System



TECHNICAL SPECIFICATIONS

MODELS

MPTAZ115DT	Desktop joystick control for 120 VAC pan/tilts, scanners and Pelco motorized zoom lenses
MPTAZ220DT	Desktop joystick control for 230 VAC pan/tilts, scanners and Pelco motorized zoom lenses
MPTAZ24DT	Desktop joystick control for 24 VAC pan/tilts, scanners and Pelco motorized zoom lenses
MPTAZ24DT/220	Same as MPTAZ24DT except 230 VAC input voltage

CONTROLS

Zoom	Push-button momentary switch ZOOM TELE ZOOM WIDE
Focus	Push-button momentary switch NEAR FAR
Iris	Push-button momentary switch OPEN CLOSE
Lens Speed	Push-button momentary switch INCREASE DECREASE
Pan/Tilt	Joystick, 8-position (Up, down, left, right, and simultaneous combinations of pan/tilt functions)
Auto/Random Select	Push-button momentary switch SELECT
Indicator Lamps	Light emitting diode

ELECTRICAL

Input Voltage	MPTAZ115DT, MPTAZ24DT	120 VAC, 50/60 Hz
	MPTAZ24DT/220, MPTAZ220DT	230 VAC, 50/60 Hz
Output Voltage	MPTAZ24DT, MPTAZ24DT/220	24 VAC
	MPTAZ115DT	120 VAC
	MPTAZ220DT	230 VAC
Lens Voltage		0-12 VDC
Fuse Protection	MPTAZ115DT, MPTAZ24DT	1 ASB
	MPTAZ24DT/220, MPTAZ220DT	0.5 ASB
Power Cord		3-wire grounded, #18 AWG
Connectors	MPTAZ115DT, MPTAZ220DT	AMP CPC type
	MPTAZ24DT, MPTAZ24DT/220	10-position terminal strip
Conductor Requirements		(No additional conductors required for Auto/Random scan operation) 9 plus ground for MPTAZ115DT or MPTAZ220DT (when used with pan/tilt and lens) 8 plus ground for MPTAZ115DT (when used with scanner and lens) 9 and no ground for MPTAZ24DT or MPTAZ24DT/220 (when used with pan/tilt and lens) 8 and no ground for MPTAZ24DT or MPTAZ24DT/220 (when used with scanner and lens)

Cable Distances

Pan/Tilt	Refer to specifications for the specific pan/tilt to be used with the control.
Lens	The following distances are approximate maximum recommended under the following conditions: <ul style="list-style-type: none">• Based on a 35 mA load @ 12 VDC• Single lens function activation• 10% line loss in voltage at the lens motor

22 AWG (0.3 mm ²)	1,062 feet (323 meters)
20 AWG (0.5 mm ²)	1,688 feet (514 meters)
18 AWG (1.0 mm ²)	2,686 feet (818 meters)

Note: Video is limited to 500 feet on RG-59 coax cable without equalization amplification

GENERAL

Construction	
Cover	Steel, black polyester powder coat
Chassis	Steel, zinc plated
Panel	Aluminum, black polyester powder coat with white silkscreen
Unit Weight	
MPTAZ115DT	5.17 lb (2.34 kg)
MPTAZ220DT	5.17 lb (2.34 kg)
MPTAZ24DT	6.48 lb (2.94 kg)
MPTAZ24DT/220	6.59 lb (2.99 kg)
Shipping Weight	
MPTAZ115DT	7 lb (3.17 kg)
MPTAZ220DT	7 lb (3.17 kg)
MPTAZ24DT	8 lb (3.62 kg)
MPTAZ24DT/220	9 lb (4.07 kg)

CERTIFICATIONS

- CE compliant (MPTAZ24DT/220)
- FCC, Class A (MPTAZ115DT, MPTAZ24DT)

OPTIONS

R400	Rack mount kit for MPTAZ series controls. Two controls can be racked together; blank filler plate provided for less than 2 modules. 1 RU
RB115	Relay box for 120 VAC pan/tilts and scanners. Extends operating distance (control to relay box) up to a maximum of 13,000 feet (3,962 m) utilizing 16 AWG. Use with 24 VAC output controls.
RB24	Same as RB115 except for use with 24 VAC pan/tilts and scanners.
RB220	Same as RB115 except for use with 230 VAC pan/tilts and scanners.



Pelco Worldwide Headquarters:

3500 Pelco Way, Clovis, California 93612-5699 USA
USA & Canada Tel: (800) 289-9100 • FAX (800) 289-9150 • DataFAX (800) 289-9108
International Tel: (559) 292-1981 • FAX (559) 348-1120 • DataFAX (559) 292-0435
www.pelco.com

Specifications subject to change without notice.
©Copyright 2002, Pelco. All rights reserved.