

PMC14F Monitor

14-INCH COLOR, HIGH RESOLUTION

Product Features

- High Resolution
- 100% Steel Housing
- Front Panel Controls
- 110-240 VAC Input
- Built-in Speaker
- Video and Audio Input and Output
- S-VHS Input for Separate Y-C Signals
- Digital Comb Filter for Significantly Improved Picture Quality
- Automatic Color Switching System (PAL/NTSC)
- Handles Facilitate Rack Mounting




The **PMC14F** is a high-resolution color video monitor that can be used in desktop applications or rack mounted using the optional easy-to-assemble rack mount kit. The monitor comes with handles which facilitate ease of handling when installing in a rack.

The **PMC14F** supports both NTSC and PAL video, as well as 120 VAC and 230 VAC input power. For your convenience, the unit is supplied with two grounded power cords: one for 120 VAC and a "Euro"-style one for 230 VAC. An automatic switching system makes all the necessary changes for adapting to the required formats. Manual selection is not required.

In addition, the **PMC14F** features audio input and output. The monitor's S-VHS, high-resolution video (460 horizontal lines at center), and digital comb filter add to the superior picture quality features of the product.

This monitor works very well in both large and small applications.

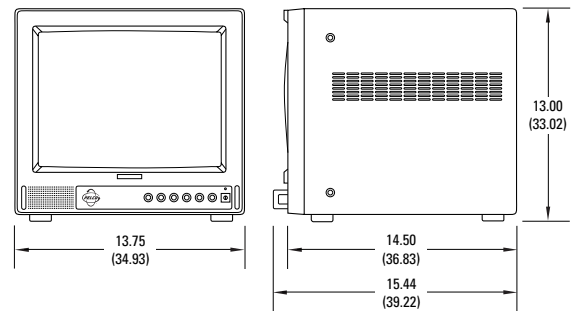

NOTE: VALUES IN PARENTHESES ARE CENTIMETERS; ALL OTHERS ARE INCHES.



DataFAX
SPEC: 21950
MANUAL: 219506
C1950 / REVISED 2-03



TECHNICAL SPECIFICATIONS

MODEL

PMC14F Color monitor, 14-inch (35.56 cm) picture display, NTSC or PAL, auto select

ELECTRICAL

Input Voltage 110-240 VAC, 50/60 Hz
Power Consumption 60 watts
Horizontal Resolution 460 lines (center)
380 lines (corners)
Picture Tube 14 inches (35.56 cm) measured diagonally
Effective
Picture Size
Height 8.27 inches (21.0 cm)
Width 11.0 inches (28.0 cm)
Input Signal Composite video, negative synch:
Y : 1.0 Vp-p
C : 0.286 Vp-p
Terminals
Video Input Level/
Impedance 1 Vp-p/75 ohms
Video Output Level/
Impedance 1 Vp-p/75 ohms
Audio Input Level/
Impedance 0.3 Vrms/25 ohms (over)
Audio Output Level/
Impedance 0.3 Vrms/4.7K ohms (under)
Subcarrier Frequency
Sync Range 3.579549 MHz \pm 200 Hz
4.433619 MHz \pm 200 Hz
at room temperature
23.5KV \pm 500V
High Voltage
Convergence <1.0 mm (at center of picture)
<1.4 mm (at corners of picture)
Brightness More than 250 lux in 100% white signal picture
at center
Total Geometric Distortion <3%

GENERAL

Connectors
Video Input/Output BNC
S-VHS Input 4-pin mini DIN
Audio Input/Output RCA
AC Power Cord Unit is supplied with two grounded power cords; one for 120 VAC and a "Euro"-style one for 230 VAC
Construction Steel cabinet
Finish Black with black bezel around screen
Unit Weight 26.75 lb (12.13 kg)
Shipping Weight 32 lb (14.51 kg)

ENVIRONMENTAL

Operating Temperature 32° to 106°F (0° to 41°C)
Humidity 0% to 90% (non-condensing)

CERTIFICATIONS

- CE, Class B
- UL Listed
- UL Listed to Canadian safety standards
- FCC, Class A

RECOMMENDED MOUNTS

RMA14F Rack kit for mounting one monitor in a 19" W (48.26 cm) rack. (8 RUs.) Black polyester powder coat finish.
MR5000M Viewing system ceiling monitor mount.



Pelco Worldwide Headquarters:

3500 Pelco Way, Clovis, California 93612-5699 USA
USA & Canada Tel: (800) 289-9100 • FAX (800) 289-9150 • DataFAX (800) 289-9108
International Tel: (559) 292-1981 • FAX (559) 348-1120 • DataFAX (559) 292-0435
www.pelco.com

Specifications subject to change without notice.
©Copyright 2003, Pelco. All rights reserved.