


|                         |                                    | 1/2"                  |                       | 1/3"                 |                |
|-------------------------|------------------------------------|-----------------------|-----------------------|----------------------|----------------|
| USE                     | FOR 1/1.8", 1/2", 1/3" MEGA CAMERA |                       |                       |                      |                |
| FOCAL LENGTH            | f=12~360mm                         |                       |                       |                      |                |
| IRIS RANGE              | F=2.6~360                          |                       |                       |                      |                |
| IMAGE SIZE              | 5.4x7.2mm (φ9)                     |                       | 4.8x6.4mm (φ8)        |                      | 3.6x4.8mm (φ6) |
| FIELD ANGLE             | DIA.                               | (w) 40.8° (T) 1.46°   | (w) 36.5° (T) 1.30°   | (w) 27.6° (T) 0.98°  |                |
|                         | HOR.                               | (w) 32.9° (T) 1.17°   | (w) 29.4° (T) 1.05°   | (w) 22.1° (T) 0.79°  |                |
|                         | VER.                               | (w) 24.8° (T) 0.88°   | (w) 22.1° (T) 0.79°   | (w) 16.6° (T) 0.59°  |                |
| FOCUS RANGE             | ∞~1.8m                             |                       |                       |                      |                |
| FIELD OF VIEW AT M.O.D. | DIA.                               | (w)1252mm (T) 43.6mm  | (w) 1113mm (T) 38.8mm | (w) 833mm (T) 29.3mm |                |
|                         | HOR.                               | (w) 1001mm (T) 35.0mm | (w) 889mm (T) 31.2mm  | (w) 666mm (T) 23.4mm |                |
|                         | VER.                               | (w) 749mm (T) 26.4mm  | (w) 666mm (T) 23.4mm  | (w) 499mm (T) 17.6mm |                |
| FLANGE BACK             | 17.526mm in air                    |                       |                       |                      |                |
| BACK FOCUS              | 24.5mm in air                      |                       |                       |                      |                |
| DISTORTION (TV)         | (w) -0.6% (T) 0.38%                | (w) -0.5% (T) 0.26%   | (w) -0.3% (T) 0.15%   |                      |                |
| CREAR APERTURE          | FRONT φ81mm                        |                       | REAR φ18mm            |                      |                |
| EXIT PUPIL POSITION     | -136.4mm                           |                       |                       |                      |                |
| WEIGHT                  | 1700g                              |                       |                       |                      |                |


DC (DIRECT CONTROL)

|             |          |                                  |
|-------------|----------|----------------------------------|
| DRIVE COIL  | RESISTOR | 190 Ω (20°)                      |
|             | COLOR    | RED(+) 3pin<br>BLACK 4pin        |
| BRAKE COIL  | RESISTOR | 1150 Ω (20°)                     |
|             | COLOR    | YELLOW(+) 2pin<br>GREEN 1pin     |
| DRIVE VOLT. | OPEN     | LESS THAN +4V                    |
|             | CLOSE    | OVER THAN 0V<br>W/CLOSING SPRING |

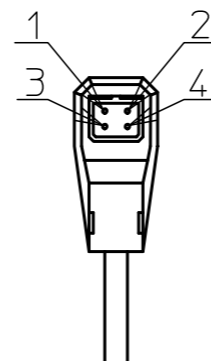

MOTOR CABLE

- (+) GREEN FOCUS NEAR
- (+) BLACK FOCUS FAR
- (+) YELLOW ZOOM IN
- (+) RED ZOOM OUT

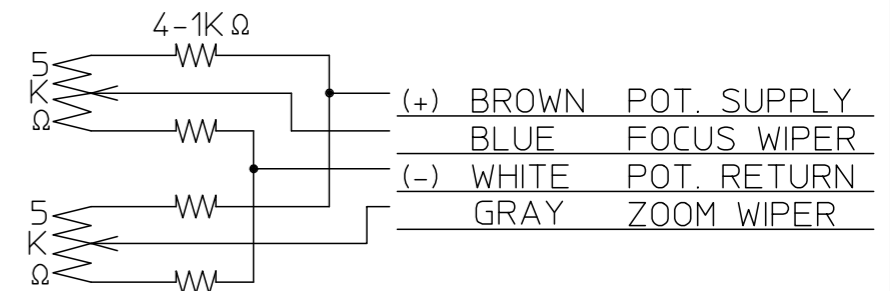

|          |       |        |                      |      |
|----------|-------|--------|----------------------|------|
| 09.07.07 | 作成年月日 | 尺度 1/1 | 承認 八木                | 製 富永 |
|          |       | 機種名    | 1/1.8" 12-360mm/F2.6 |      |
|          |       | 機種番    | LMZ1236              |      |